


## Long life, low energy, low maintenance



**NOW with LED or  
Cold Cathode lamp**

- One box solution complete with "EXIT" and "Pictograph" diffuser inserts for all diffuser combinations.
  - High integrity 70°C Nickel Cadmium Dual-rate Charge battery pack.
  - Large terminal block and cable entry hole minimise installation fuss.
  - Quick connect bracket for fast wall or ceiling mounting.
  - Choice of long life and energy efficient CCFL (Cold Cathode) or LED.
  - Patented industry first, tamper-proof "legend cover" for directional safety signage.
  - High downward light component gives the Cleverfit® superior AS2293 spacing performance.
  - Industry leading three year warranty.
- Single point, Clever-test® DALI compatible or Zoneworks® computerised testing options available.

### ONE BOX: BOTH STANDARDS



All these inserts come standard with each Cleverfit®.

Easy to configure on site, easy to order and easy to specify.

## One Box- All Options...

Introducing a range of exit signs which boast not only premium features, but premium looks as well. Quick installation and reliable performance is only the beginning.

All diffuser combinations of single-sided or double-sided, with or without arrows, "EXIT" or "Pictograph" options can be configured on site from the one box.

The Premium Cleverfit® exit is available in long life, energy efficient cold cathode lamp or high brightness LED. Switchmode electronics and a dual-rate charge, high temperature Nickel Cadmium battery combination ensure maximum reliability.

Our state-of-the-art Premium Cleverfit® pays for itself through energy and maintenance savings in less than three years.


After installation, compliance testing has never been easier with Clever-test® and Zoneworks® computerised options available across the range. Why waste your valuable time scheduling, performing and then recording emergency lighting discharge tests when the emergency lights can do it themselves?

For more options available please contact Clevertronics.

## Specifications

### CATALOGUE NUMBERS AND DESCRIPTIONS

Please see Clevertronics website for IES files and latest information.

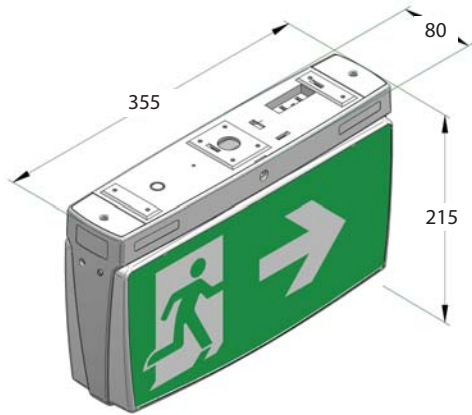


DIMENSIONS (mm)

PREMIUM CLEVERFIT EXIT	TESTING OPTIONS			
	Standard	Clever-test	DALI Em	Zoneworks
■ CCFL Maintained	PCF4	DCF4	ZCF4-DALI	ZCF4
Description: Wall or ceiling quick-connect exit, 4w 50,000hr Cold Cathode lamp, dual-rate charge high temp Ni-Cad battery, 3 year warranty, single and double-sided and directional options configurable on-site. (Clever-test/ DALI Em/ Zoneworks compatible) Clevertronics Cleverfit Exit. AS2293 Classification Co=D3.2 C90=E3.2				
■ LED Maintained	PCFLED	DCFLED	ZCFLED-DALI	ZCFLED
Description: Wall or ceiling quick-connect exit, 50,000hr LED replaceable lamp bar, dual-rate charge high temp Ni-Cad battery, 3 year warranty, single and double-sided and directional options configurable on-site. (Clever-test/ DALI Em/ Zoneworks compatible) Clevertronics Cleverfit Exit. AS2293 Classification Co=E1.6 C90=E1.25				

SPACING TABLE	MOUNTING HEIGHTS			
	Classification	2.1m	2.4m	2.7m
D3.2	6.5	6.6	6.6	6.5
E3.2	6	6.2	6.4	6.6
E1.6	4.8	4.8	4.8	4.4
E1.25	4.2	4.2	4	3.6

\*Maximum standard mounting height is 2.7m but for exceptions see AS2293.1 2005

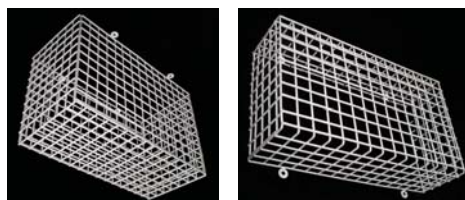

For accessories including wire guards and other options please contact our office.

### ONE BOX: BOTH STANDARDS

*Clevertronics patented solution to simplify directional options.*

One box is all you will ever need regardless of what standard you require, because our "ONE BOX: BOTH STANDARDS" exits come with all the "EXIT" and "Pictograph" inserts. One exit, one part number, one price, just open the box and PICK, SLIP AND CLIP.



1 Pick the correct decal



2 Slip it in



3 Clip it shut

Please check our website for your closest Clevertronics office and local representative.

[www.clevertronics.com.au](http://www.clevertronics.com.au)

Due to changes in industry standards and Clevertronics policy of product improvement, specification details are subject to change without notice.