

# Liftcar Emergency



- The complete range of AS1735 compliant Liftcar Emergency batters, Control boxes and Alarm bells



## Liftcar Emergency units that are built to last!

All Clevertronics Liftcar Emergency Batters and Control boxes use SMD (Surface Mount) 105 deg C Electronics. They come standard with Industrial duty Powder coated steel bodies with optional weatherproof versions are available for areas where moisture and/or dust is prevalent.

Clevertronics Liftcar Emergency Batters and Control Boxes are available as single point units or can be upgraded with Clevertronics onboard Self-Test option. For more information contact your nearest Clevertronics Sales office.

### LIFTCAR CONTROL BOXES & ALARM BELLS

Catalogue No.	Description
LCB12110	Liftcar 12V Emergency Power Supply - 10W Bell Only
LCB12150	Liftcar 1X50W Dichroic Emergency Control Box
LCB12150-BELL	Liftcar 1X50W Dichroic Emergency Control Box - c/w Bell
LCB12220	Liftcar 2X20W Dichroic Emergency Control Box
LCB12220-BELL	Liftcar 2X20W Dichroic Emergency Control Box - c/w Bell
LCB12250	Liftcar 2X50W Dichroic Emergency Control Box
LCB12250-BELL	Liftcar 2X50W Dichroic Emergency Control Box - c/w Bell
LCB6118	Liftcar 1X18W T8 Emergency Control Box
LCB6118-BELL	Liftcar 1X18W T8 Emergency Control Box - c/w Bell
LCB6136	Liftcar 1X36W T8 Emergency Control Box
LCB6136-BELL	Liftcar 1X36W T8 Emergency Control Box - c/w Bell
AB6V6	6VDC Red Alarm Bell for Liftcars
AB12V6	12VDC Red Alarm Bell for Liftcars

# Liftcar Emergency

## LIFTCAR EMERGENCY BATTENS

### Catalogue Numbers

#### Standard Lift Car

##### MAINTAINED

- LCS8250 Lift 1X30W Bare
- LCS8251 Lift 1X30W Diffused
- LCS8253 Lift 1X30W Wireguarded
- LCS8260 Lift 1X18W Bare
- LCS8261 Lift 1X18W Diffused
- LCS8263 Lift 1X18W Wireguarded
- LCS8270 Lift 1X36W Bare
- LCS8271 Lift 1X36W Diffused
- LCS8273 Lift 1X36W Wireguarded
- LCS8280 Lift 1X58W Bare
- LCS8550 Lift 2X30W Bare
- LCS8551 Lift 2X30W Diffused
- LCS8553 Lift 2X30W Wireguarded
- LCS8560 Lift 2X18W Bare
- LCS8561 Lift 2X18W Diffused
- LCS8563 Lift 2X18W Wireguarded
- LCS8570 Lift 2X36W Bare
- LCS8571 Lift 2X36W Diffused
- LCS8573 Lift 2X36W Wireguarded








#### Self Test

##### MAINTAINED

- LCSST8250 Lift 1X30W Bare
- LCSST8251 Lift 1X30W Diffused
- LCSST8253 Lift 1X30W Wireguarded
- LCSST8260 Lift 1X18W Bare
- LCSST8261 Lift 1X18W Diffused
- LCSST8263 Lift 1X18W Wireguarded
- LCSST8270 Lift 1X36W Bare
- LCSST8271 Lift 1X36W Diffused
- LCSST8273 Lift 1X36W Wireguarded
- LCSST8280 Lift 1X58W Bare
- LCSST8550 Lift 2X30W Bare
- LCSST8551 Lift 2X30W Diffused
- LCSST8553 Lift 2X30W Wireguarded
- LCSST8560 Lift 2X18W Bare
- LCSST8561 Lift 2X18W Diffused
- LCSST8563 Lift 2X18W Wireguarded
- LCSST8570 Lift 2X36W Bare
- LCSST8571 Lift 2X36W Diffused
- LCSST8573 Lift 2X36W Wireguarded

#### General Specifications

- Power Source: 230 - 250 VAC, 50Hz  
 Construction: Std = PC Steel Body  
 WP = GRP Body  
 IP Rating: Std = IP21  
 WP = IP65

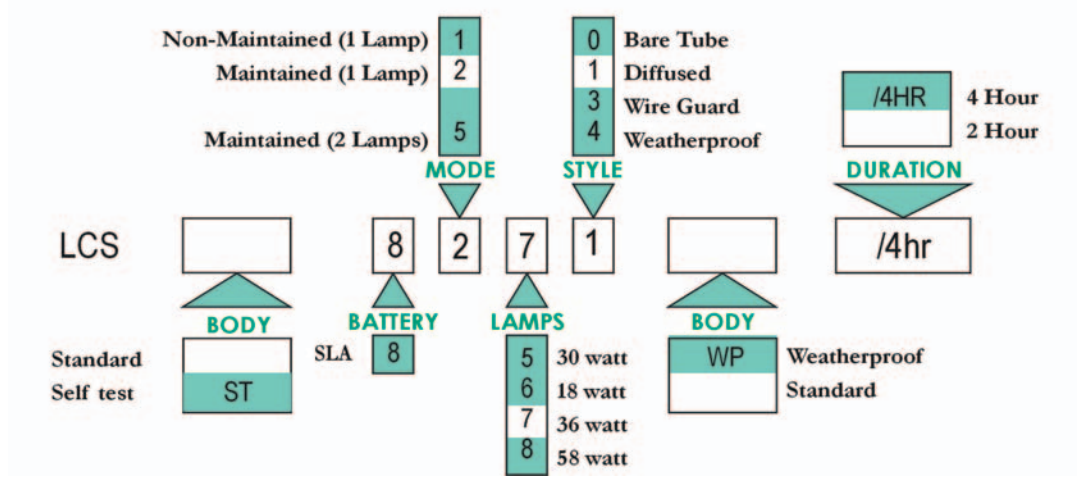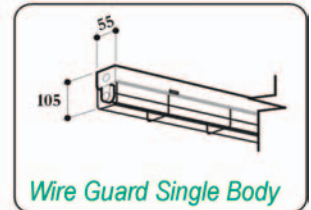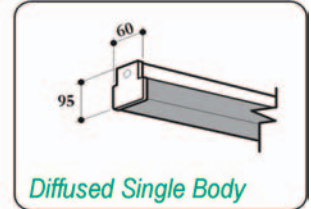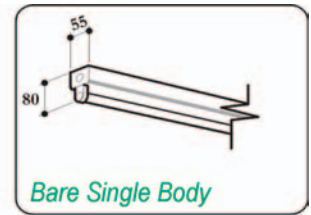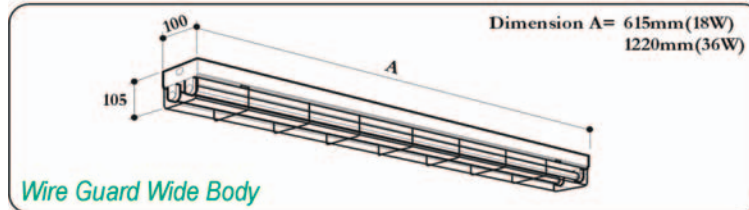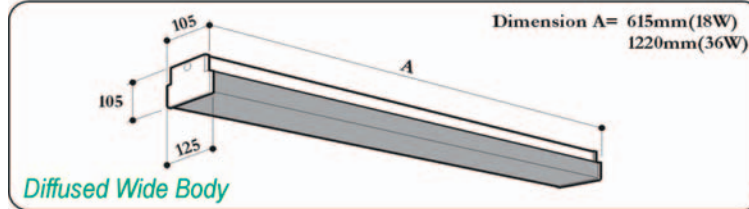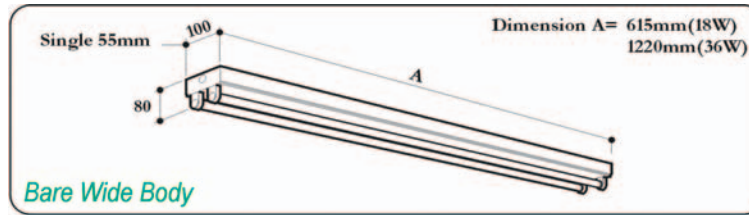

## CLEVERTRONICS LIFTCAR EMERGENCY TEST OPTIONS

### Single Point Unit (SPU)



### Self Test

Single Point emergency fittings are manually discharge tested via a test switch located at each electrical distribution board. Attendance is required during testing.

\*Self Test Emergency fittings automatically discharge test themselves, at 6 monthly intervals. Manual testing can also be performed from each fitting or the Electrical distribution board. Attendance is not required during testing.

Test results can only be determined via visual inspection of each emergency light immediately following 90/120 minute test period.

Self Test Emergency fittings have a multi-function LED status indicator. Test results can be determined via visual inspection of this indicator at any time after a test.

**\*Self Test** Liftcar fittings use an onboard microprocessor controller to automate testing without the need for a Central PC or network.



For more information, contact your local Clevertronics office:  
 Melbourne (Head Office) (03) 9532 0566  
 Brisbane (07) 3200 2555 Sydney (02) 9674 8944

[www.clevertronics.com.au](http://www.clevertronics.com.au)

Due to changes in industry standards and Clevertronics policy of product improvement, specification details are subject to change without notice.